


SPECIFICATIONS

Item No.: SCA1800

Description: Voltage Type Dual-axis Inclinometer Module

Version: Ver.06

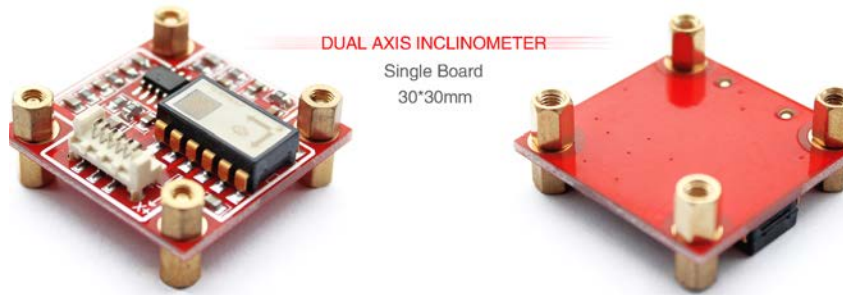

General Description

SCA1800T is a dual axis inclinometer module with analog voltage output, adopts VTI MEMS control unit by measuring the static gravity field changes then convert into inclination change, the changes in mode output voltage (0-5V), mainly used to measure the inclination of the object with respect to the horizontal plane. Resolution is 0.0025deg, accuracy specification please refer to the page 3 of product technical data .

This product uses non-contact measurement principle, can real-time output current posture inclination, Simple to use, and no need to retrieve the relative changed surface to install. Latest MEMS inclinometer productive technology production, high-precision, small size, strong resistance to external electromagnetic interference ability, the ability to withstand shock and vibration. It is the ideal choice for industrial equipment, platform measuring attitude!

Features

- Dual-Axis Inclinometer(Single axis are optional)
- Accuracy: refer to the technical data
- Output interface :0~5V
- Resolution: 0.0025°
- Measuring Range : $\pm 1 \sim \pm 85^\circ$ optional
- DC 5V voltage input
- Wide temperature working: $-40 \sim +85^\circ\text{C}$
- Small Volume : 30×30×7mm (customized)

Application:

- Engineering vehicles automatic leveling
- Aerial platform vehicle, lifter safety & protection
- Underground drill posture navigation
- Based on the angle direction measurement
- Directional satellite communications antenna pitching angle measurement
- Bridge & dam detection
- Medical facilities angle control
- Shield pipe jacking application
- Geological equipment inclined monitoring

Ordering Information:

Item No.	Description	Output corresponding: 0V-5V
SCA1800-XXX	Note: XXX means angle measuring range optional number XXX from 10deg~85deg range optional	

Electronic Characteristics

Parameters	Conditions	Min	Standard	Max	Unit
Power supply	Unregulated voltage		+5		V
Working current			5		mA
Output overload	Resistive	10			kΩ
	Capacitive			20	nF
Working temperature		-40		+85	°C
Store temperature		-55		+100	°C


Technical Data

Parameters	Conditions	SCA1800-05	SCA1800-15	SCA1800-30	SCA1800-85	Unit
Measuring range		±05	±15	±30	±85	°
Measuring axis		X-Y	X-Y	X-Y	X-Y	
Zero position		2.5	2.5	2.5	2.5	V
ZERO temperature drift	-25~85°	±0.008	±0.008	±0.008	±0.008	°/°C
Whole Measuring range output voltage range		0~5	0~5	0~5	0~5	V
Response frequency		20	20	20	20	Hz
Output noise density	DC..100HZ	0.0008	0.0008	0.0008	0.0008	°/√Hz
Resolution	Bandwidth10 Hz	0.0025	0.0025	0.0025	0.0025	°
Accuracy	Indoor temperature	0.05	0.08	0.2	0.5	°
Sensitivity	Formula 1	0.5	0.1667	0.0833	0.0278	V/°
	Formula 2	28.685	9.660	5	2.5	V/G
Weight	25g (bare board)					

* This Technical data only list ±05°、±15°、±30°、±85° standard measuring range, other measuring range all can customize according to customer's request.

Measuring Directions&Fix


The installation must guarantee the product bottom is parallel to measured face, and reduce the influence of dynamic and acceleration to the sensor. This product can be installed horizontally or mounted vertically ,mounted vertically selection is only applicable to the single axis module, pls install horizontally for measuring range $\leq 60^\circ$ products,for installation please refer to the following scheme:

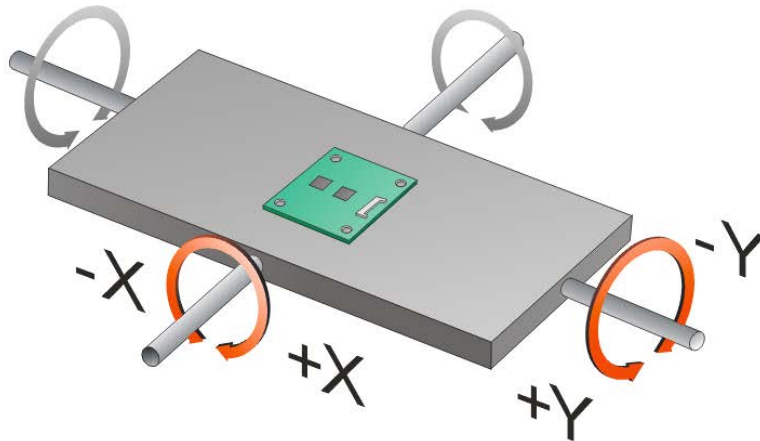

Electrical Connection

Line color function	Pin1	Pin2	Pin3	Pin4	Pin5	Pin6
	DC 5V	NC	GND	X OUT	Y OUT	GND
	Power positive	NC	Power negative	X axis voltage output	Y axis voltate output	

Dimension

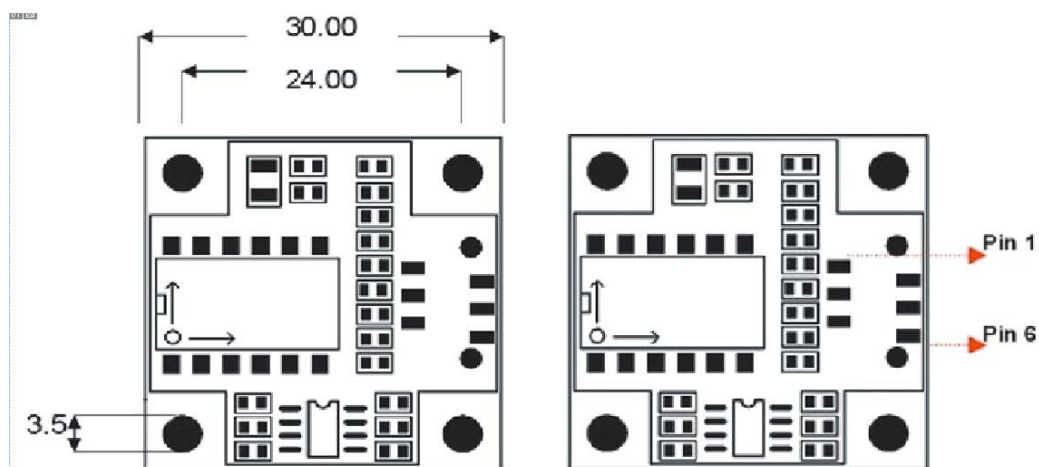

Size: L30mm×W30mm×H7mm

Voltage output & Angle convert formula

**Formula 1: Angle= (output voltage—ZERO position voltage)÷Angle sensitivity.
Angle sensitivity: please refer to Page 3 technical data , unit is mV/°**

Formula 2 Inclination angle = arc sin $\left(\frac{V_{out} - \text{Offset}}{\text{Sensitivity}} \right)$

Note: When the the inclination measuring range within lower than 15 degrees, the angle calculation method using the formula 1.

When the inclination angle measuring range bigger than 15 degrees or over, due to the inclination of measuring the Earth's gravitational pull original amount,Inclination and the output voltage into a sinusoidal relationship, the angle calculation method using the formula 2.

Vout: tilt sensor measuring output voltage value

Offset: ZERO positon voltage (2.5V)

Sensitivity: please refer to Page 3 technical data , different formula corresponding to different sensitivity .



More information please visit Rion's company website: www.rion-tech.net



深圳市瑞芬科技有限公司

CHINA SHENZHEN RION TECHNOLOGY CO.,LTD.

✓ 倾角传感器 ✓ 倾角（调平）开关 ✓ 数显水平仪 ✓ 陀螺仪
✓ 三维电子罗盘 ✓ 加速度计 ✓ 航姿参考系统 ✓ 寻北仪

T: 0755-29657137 / 29761269 F: 0755-29123494

W: www.rion-tech.net E: sales@rion-tech.net

A: 中国·深圳市宝安区82区华丰科技园 五期3F

Attitude Solution Provider
姿态方案解决专家！