



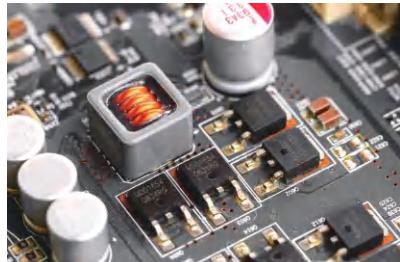


HY-HVSU series

Programmable High Voltage DC Power Supply

Military Quality Power Supply Expert

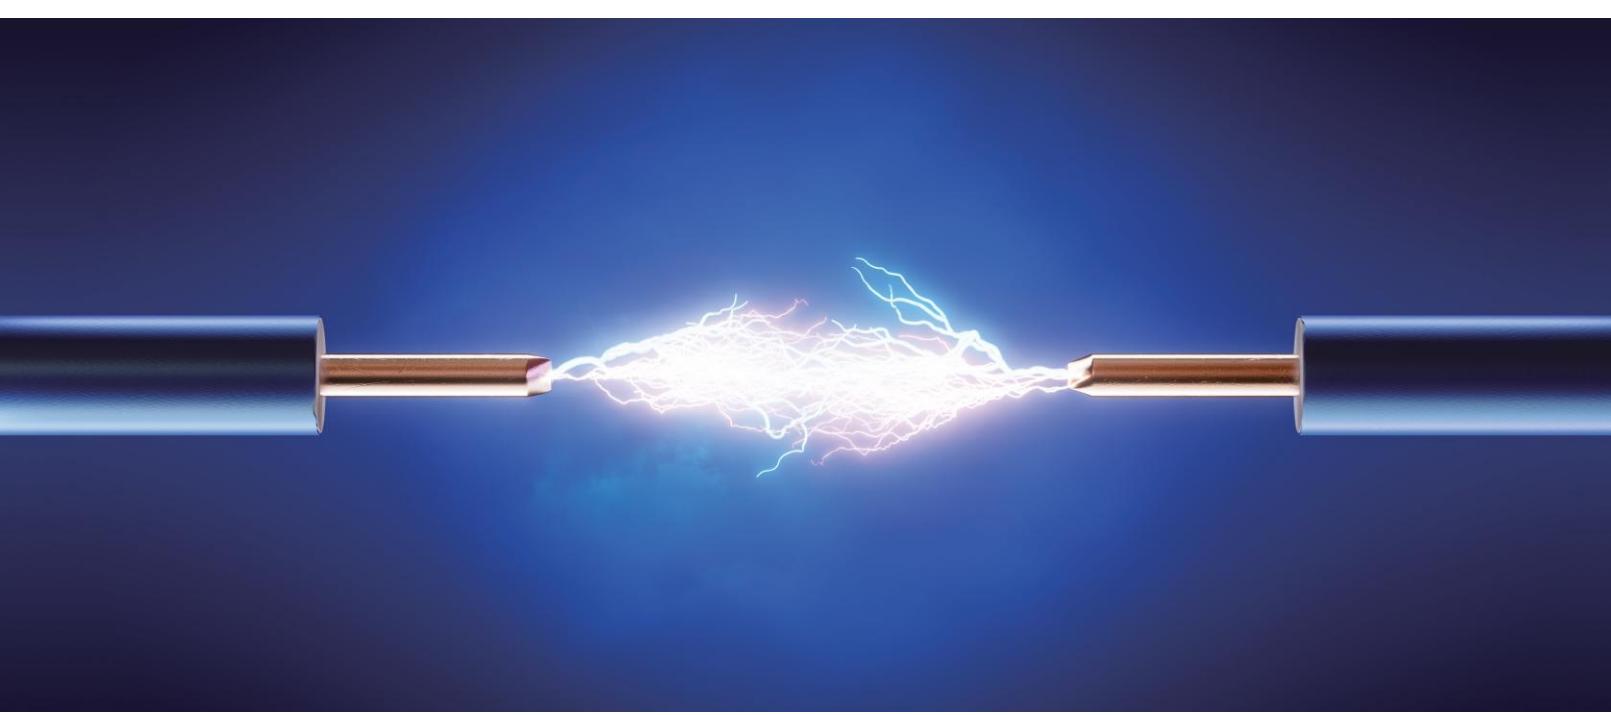

High Voltage, High Power, High Precision

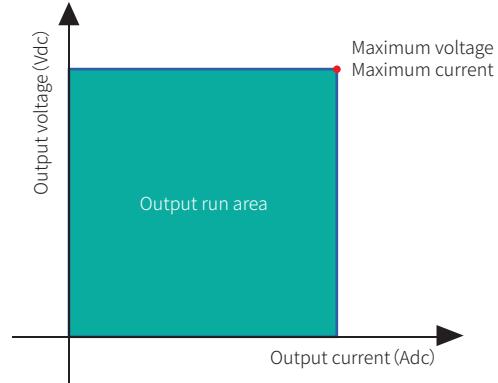

This is a high voltage programmable DC power supply, voltage multi-grade optional, with flexible intelligent programming function, simple panel easy to operate, widely praised among customers.

Product Features


- Output voltage models are 2kV, 3kV, 4kV, 5kV, 6kV, 8kV, 10kV, 15kV, 20kV.....200kV, etc
- Optional negative polarity output (N)
- High power density: single machine maximum 150kW
- 16 bits D/A high precision converter, accurate output
- 20 bits A/D high precision converter, more accurate read back

Application Field


It is often used for high-voltage power supply of power semiconductor devices, the voltage is up to 200kV, and the power semiconductor devices such as IGBT, MOS tube, diode, silicon carbide device are tested for voltage resistance and breakdown.

- | | |
|-----------------------------------|--|
| ■ Semiconductor technology | ■ Diode reverse bias test |
| ■ High voltage capacitor charging | ■ Breakdown test of high voltage devices |
| ■ Electrostatic electret | ■ High voltage insulation test |
| ■ X-ray system | ■ Electrostatic application |
| ■ Ion beam | ■ Electron accelerator |
| ■ Electron beam | ■ Laser |
| ■ High energy physics research | ■ Industrial Applications |
| ■ Power semiconductor test | ■ Scientific experiments |

Actual Test Waveform

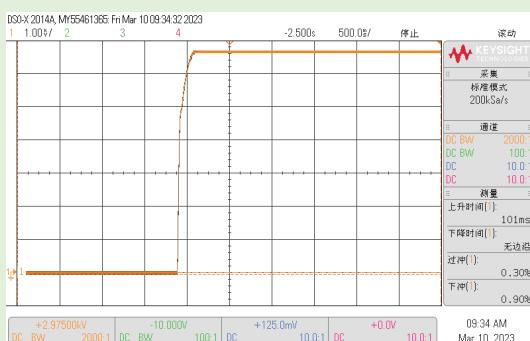

HY-HVSU 10kV-50mA Full load rise time:101ms

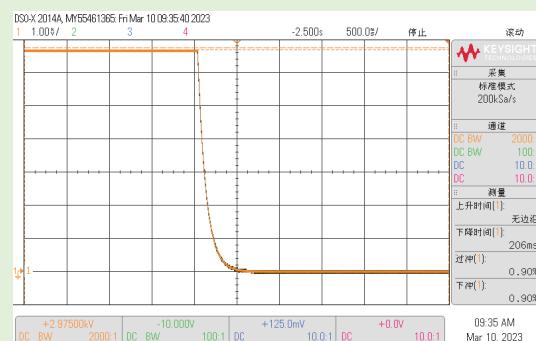

HY-HVSU 10kV-50mA Full load descent time:206ms

HY-HVSU Series Product Selection Table

Product Model Naming Rules						
Product series	Output voltage	Output current	Output polarity	Optional function	Optional function	
HY-HVSU	2kV	-	5000	-	N	CF
Example of model selection: Product model: HY-HVSU 2kV-5000-N-CF Output voltage 0-2000V, output current 5000mA, N represents negative polarity, without N is positive polarity Custom features that users choose to purchase						
Communication protocol	Standard communication interface			Optional communication interface		
Modbus	RS-485			- LAN :Ethernet communication interface		
SCPI	RS-232			- CAN :CAN communication interface		
	Digital I/O			- GPIB :GPIB communication interface		
				- IA :Analog quantity programming and monitoring interface (isolated type)		

* All technical indicators can only be guaranteed when the equipment runs continuously for more than 30 minutes at the specified operating temperature.

HY-HVSU Series Product Model Selection And Parameters		
---	--	--

Special specifications outside the voltage/current/power range in the selection table can be customized

2kV Series Power Supply Selection								
Models	Output current	Output power	Models	Output current	Output power	Models	Output current	Output power
HY-HVSU 2kV-500	500mA	1kW	HY-HVSU 2kV-7500	7500mA	15kW	HY-HVSU 2kV-30	30A	60kW
HY-HVSU 2kV-1000	1000mA	2kW	HY-HVSU 2kV-10000	10000mA	20kW	HY-HVSU 2kV-35	35A	70kW
HY-HVSU 2kV-1500	1500mA	3kW	HY-HVSU 2kV-12.5	12.5A	25kW	HY-HVSU 2kV-40	40A	80kW
HY-HVSU 2kV-2000	2000mA	4kW	HY-HVSU 2kV-15	15A	30kW	HY-HVSU 2kV-45	45A	90kW
HY-HVSU 2kV-2500	2500mA	5kW	HY-HVSU 2kV-17.5	17.5A	35kW	HY-HVSU 2kV-50	50A	100kW
HY-HVSU 2kV-3000	3000mA	6kW	HY-HVSU 2kV-20	20A	40kW	HY-HVSU 2kV-55	55A	110kW
HY-HVSU 2kV-4000	4000mA	8kW	HY-HVSU 2kV-22.5	22.5A	45kW	HY-HVSU 2kV-65	65A	130kW
HY-HVSU 2kV-5000	5000mA	10kW	HY-HVSU 2kV-25	25A	50kW	HY-HVSU 2kV-75	75A	150kW

3kV Series Power Supply Selection								
Models	Output current	Output power	Models	Output current	Output power	Models	Output current	Output power
HY-HVSU 3kV-334	334mA	1kW	HY-HVSU 3kV-5000	5000mA	15kW	HY-HVSU 3kV-20	20A	60kW
HY-HVSU 3kV-667	667mA	2kW	HY-HVSU 3kV-6667	6667mA	20kW	HY-HVSU 3kV-23.4	23.4A	70kW
HY-HVSU 3kV-1000	1000mA	3kW	HY-HVSU 3kV-8350	8350mA	25kW	HY-HVSU 3kV-26.7	26.7A	80kW
HY-HVSU 3kV-1334	1334mA	4kW	HY-HVSU 3kV-10	10A	30kW	HY-HVSU 3kV-30	30A	90kW
HY-HVSU 3kV-1667	1667mA	5kW	HY-HVSU 3kV-11.7	11.7A	35kW	HY-HVSU 3kV-33.4	33.4A	100kW
HY-HVSU 3kV-2000	2000mA	6kW	HY-HVSU 3kV-13.4	13.4A	40kW	HY-HVSU 3kV-36.7	36.7A	110kW
HY-HVSU 3kV-2667	2667mA	8kW	HY-HVSU 3kV-15	15A	45kW	HY-HVSU 3kV-43.4	43.4A	130kW
HY-HVSU 3kV-3334	3334mA	10kW	HY-HVSU 3kV-16.7	16.7A	50kW	HY-HVSU 3kV-50	50A	150kW

HY-HVSU Series Product Selection Table

4kV Series Power Supply Selection								
Models	Output current	Output power	Models	Output current	Output power	Models	Output current	Output power
HY-HVSU 4kV-250	250mA	1kW	HY-HVSU 4kV-3750	3750mA	15kW	HY-HVSU 4kV-15	15A	60kW
HY-HVSU 4kV-500	500mA	2kW	HY-HVSU 4kV-5000	5000mA	20kW	HY-HVSU 4kV-17.5	17.5A	70kW
HY-HVSU 4kV-750	750mA	3kW	HY-HVSU 4kV-6250	6250mA	25kW	HY-HVSU 4kV-20	20A	80kW
HY-HVSU 4kV-1000	1000mA	4kW	HY-HVSU 4kV-7500	7500mA	30kW	HY-HVSU 4kV-22.5	22.5A	90kW
HY-HVSU 4kV-1250	1250mA	5kW	HY-HVSU 4kV-8750	8750mA	35kW	HY-HVSU 4kV-25	25A	100kW
HY-HVSU 4kV-1500	1500mA	6kW	HY-HVSU 4kV-10	10A	40kW	HY-HVSU 4kV-27.5	27.5A	110kW
HY-HVSU 4kV-2000	2000mA	8kW	HY-HVSU 4kV-11.3	11.3A	45kW	HY-HVSU 4kV-32.5	32.5A	130kW
HY-HVSU 4kV-2500	2500mA	10kW	HY-HVSU 4kV-12.5	12.5A	50kW	HY-HVSU 4kV-37.5	37.5A	150kW

5kV Series Power Supply Selection								
Models	Output current	Output power	Models	Output current	Output power	Models	Output current	Output power
HY-HVSU 5kV-200	200mA	1kW	HY-HVSU 5kV-3000	3000mA	15kW	HY-HVSU 5kV-12	12A	60kW
HY-HVSU 5kV-400	400mA	2kW	HY-HVSU 5kV-4000	4000mA	20kW	HY-HVSU 5kV-14	14A	70kW
HY-HVSU 5kV-600	600mA	3kW	HY-HVSU 5kV-5000	5000mA	25kW	HY-HVSU 5kV-16	16A	80kW
HY-HVSU 5kV-800	800mA	4kW	HY-HVSU 5kV-6000	6000mA	30kW	HY-HVSU 5kV-18	18A	90kW
HY-HVSU 5kV-1000	1000mA	5kW	HY-HVSU 5kV-7000	7000mA	35kW	HY-HVSU 5kV-20	20A	100kW
HY-HVSU 5kV-1200	1200mA	6kW	HY-HVSU 5kV-8000	8000mA	40kW	HY-HVSU 5kV-22	22A	110kW
HY-HVSU 5kV-1600	1600mA	8kW	HY-HVSU 5kV-9000	9000mA	45kW	HY-HVSU 5kV-26	26A	130kW
HY-HVSU 5kV-2000	2000mA	10kW	HY-HVSU 5kV-10	10A	50kW	HY-HVSU 5kV-30	30A	150kW

6kV Series Power Supply Selection								
Models	Output current	Output power	Models	Output current	Output power	Models	Output current	Output power
HY-HVSU 6kV-167	167mA	1kW	HY-HVSU 6kV-2500	2500mA	15kW	HY-HVSU 6kV-10	10A	60kW
HY-HVSU 6kV-334	334mA	2kW	HY-HVSU 6kV-3334	3334mA	20kW	HY-HVSU 6kV-11.7	11.7A	70kW
HY-HVSU 6kV-500	500mA	3kW	HY-HVSU 6kV-4167	4167mA	25kW	HY-HVSU 6kV-13.4	13.4A	80kW
HY-HVSU 6kV-667	667mA	4kW	HY-HVSU 6kV-5000	5000mA	30kW	HY-HVSU 6kV-15	15A	90kW
HY-HVSU 6kV-834	834mA	5kW	HY-HVSU 6kV-5850	5850mA	35kW	HY-HVSU 6kV-16.7	16.7A	100kW
HY-HVSU 6kV-1000	1000mA	6kW	HY-HVSU 6kV-6667	6667mA	40kW	HY-HVSU 6kV-18.4	18.4A	110kW
HY-HVSU 6kV-1334	1334mA	8kW	HY-HVSU 6kV-7500	7500mA	45kW	HY-HVSU 6kV-21.7	21.7A	130kW
HY-HVSU 6kV-1667	1667mA	10kW	HY-HVSU 6kV-8400	8400mA	50kW	HY-HVSU 6kV-25	25A	150kW

8kV Series Power Supply Selection								
Models	Output current	Output power	Models	Output current	Output power	Models	Output current	Output power
HY-HVSU 8kV-125	125mA	1kW	HY-HVSU 8kV-1875	1875mA	15kW	HY-HVSU 8kV-7.5	7.5A	60kW
HY-HVSU 8kV-250	250mA	2kW	HY-HVSU 8kV-2500	2500mA	20kW	HY-HVSU 8kV-8.75	8.75A	70kW
HY-HVSU 8kV-375	375mA	3kW	HY-HVSU 8kV-3125	3125mA	25kW	HY-HVSU 8kV-10	10A	80kW
HY-HVSU 8kV-500	500mA	4kW	HY-HVSU 8kV-3750	3750mA	30kW	HY-HVSU 8kV-11.25	11.25A	90kW
HY-HVSU 8kV-625	625mA	5kW	HY-HVSU 8kV-4375	4375mA	35kW	HY-HVSU 8kV-12.5	12.5A	100kW
HY-HVSU 8kV-750	750mA	6kW	HY-HVSU 8kV-5000	5000mA	40kW	HY-HVSU 8kV-13.75	13.75A	110kW
HY-HVSU 8kV-1000	1000mA	8kW	HY-HVSU 8kV-5625	5625mA	45kW	HY-HVSU 8kV-16.25	16.25A	130kW
HY-HVSU 8kV-1250	1250mA	10kW	HY-HVSU 8kV-6250	6250mA	50kW	HY-HVSU 8kV-18.75	18.75A	150kW

HY-HVSU Series Product Selection Table

10kV Series Power Supply Selection								
Models	Output current	Output power	Models	Output current	Output power	Models	Output current	Output power
HY-HVSU 10kV-100	100mA	1kW	HY-HVSU 10kV-1500	1500mA	15kW	HY-HVSU 10kV-6	6A	60kW
HY-HVSU 10kV-200	200mA	2kW	HY-HVSU 10kV-2000	2000mA	20kW	HY-HVSU 10kV-7	7A	70kW
HY-HVSU 10kV-300	300mA	3kW	HY-HVSU 10kV-2500	2500mA	25kW	HY-HVSU 10kV-8	8A	80kW
HY-HVSU 10kV-400	400mA	4kW	HY-HVSU 10kV-3000	3000mA	30kW	HY-HVSU 10kV-9	9A	90kW
HY-HVSU 10kV-500	500mA	5kW	HY-HVSU 10kV-3500	3500mA	35kW	HY-HVSU 10kV-10	10A	100kW
HY-HVSU 10kV-600	600mA	6kW	HY-HVSU 10kV-4000	4000mA	40kW	HY-HVSU 10kV-11	11A	110kW
HY-HVSU 10kV-800	800mA	8kW	HY-HVSU 10kV-4500	4500mA	45kW	HY-HVSU 10kV-13	13A	130kW
HY-HVSU 10kV-1000	1000mA	10kW	HY-HVSU 10kV-5000	5000mA	50kW	HY-HVSU 10kV-15	15A	150kW

15kV Series Power Supply Selection								
Models	Output voltage	Output current	Output power	Models	Output voltage	Output current	Output power	
HY-HVSU 15kV-67	15kV	67mA	1kW	HY-HVSU 15kV-1000	15kV	1000mA	15kW	
HY-HVSU 15kV-134	15kV	134mA	2kW	HY-HVSU 15kV-1334	15kV	1334mA	20kW	
HY-HVSU 15kV-200	15kV	200mA	3kW	HY-HVSU 15kV-1667	15kV	1667mA	25kW	
HY-HVSU 15kV-267	15kV	267mA	4kW	HY-HVSU 15kV-2000	15kV	2000mA	30kW	
HY-HVSU 15kV-334	15kV	334mA	5kW	HY-HVSU 15kV-2334	15kV	2334mA	35kW	
HY-HVSU 15kV-400	15kV	400mA	6kW	HY-HVSU 15kV-2667	15kV	2667mA	40kW	
HY-HVSU 15kV-534	15kV	534mA	8kW	HY-HVSU 15kV-3000	15kV	3000mA	45kW	
HY-HVSU 15kV-667	15kV	667mA	10kW	HY-HVSU 15kV-3334	15kV	3334mA	50kW	

20kV Series Power Supply Selection								
Models	Output voltage	Output current	Output power	Models	Output voltage	Output current	Output power	
HY-HVSU 20kV-50	20kV	50mA	1kW	HY-HVSU 20kV-750	20kV	750mA	15kW	
HY-HVSU 20kV-100	20kV	100mA	2kW	HY-HVSU 20kV-1000	20kV	1000mA	20kW	
HY-HVSU 20kV-150	20kV	150mA	3kW	HY-HVSU 20kV-1250	20kV	1250mA	25kW	
HY-HVSU 20kV-200	20kV	200mA	4kW	HY-HVSU 20kV-1500	20kV	1500mA	30kW	
HY-HVSU 20kV-250	20kV	250mA	5kW	HY-HVSU 20kV-1750	20kV	1750mA	35kW	
HY-HVSU 20kV-300	20kV	300mA	6kW	HY-HVSU 20kV-2000	20kV	2000mA	40kW	
HY-HVSU 20kV-400	20kV	400mA	8kW	HY-HVSU 20kV-2250	20kV	2250mA	45kW	
HY-HVSU 20kV-500	20kV	500mA	10kW	HY-HVSU 20kV-2500	20kV	2500mA	50kW	

50kV Series Power Supply Selection								
Models	Output voltage	Output current	Output power	Models	Output voltage	Output current	Output power	
HY-HVSU 50kV-20	50kV	20mA	1kW	HY-HVSU 50kV-300	50kV	300mA	15kW	
HY-HVSU 50kV-40	50kV	40mA	2kW	HY-HVSU 50kV-400	50kV	400mA	20kW	
HY-HVSU 50kV-60	50kV	60mA	3kW	HY-HVSU 50kV-500	50kV	500mA	25kW	
HY-HVSU 50kV-80	50kV	80mA	4kW	HY-HVSU 50kV-600	50kV	600mA	30kW	
HY-HVSU 50kV-100	50kV	100mA	5kW	HY-HVSU 50kV-700	50kV	700mA	35kW	
HY-HVSU 50kV-120	50kV	120mA	6kW	HY-HVSU 50kV-800	50kV	800mA	40kW	
HY-HVSU 50kV-160	50kV	160mA	8kW	HY-HVSU 50kV-900	50kV	900mA	45kW	
HY-HVSU 50kV-200	50kV	200mA	10kW	HY-HVSU 50kV-1000	50kV	1000mA	50kW	

HY-HVSU Series Product Selection Table

60kV Series Power Supply Selection

Models	Output voltage	Output current	Output power
HY-HVSU 60kV-17	60kV	17mA	1kW
HY-HVSU 60kV-33	60kV	34mA	2kW
HY-HVSU 60kV-50	60kV	50mA	3kW
HY-HVSU 60kV-67	60kV	67mA	4kW
HY-HVSU 60kV-83	60kV	84mA	5kW
HY-HVSU 60kV-100	60kV	100mA	6kW
HY-HVSU 60kV-133	60kV	134mA	8kW
HY-HVSU 60kV-167	60kV	167mA	10kW

Models	Output voltage	Output current	Output power
HY-HVSU 60kV-250	60kV	250mA	15kW
HY-HVSU 60kV-334	60kV	334mA	20kW
HY-HVSU 60kV-417	60kV	417mA	25kW
HY-HVSU 60kV-500	60kV	500mA	30kW
HY-HVSU 60kV-584	60kV	584mA	35kW
HY-HVSU 60kV-667	60kV	667mA	40kW
HY-HVSU 60kV-750	60kV	750mA	45kW
HY-HVSU 60kV-834	60kV	834mA	50kW

70kV Series Power Supply Selection

Models	Output voltage	Output current	Output power
HY-HVSU 70kV-14.3	70kV	14.3mA	1kW
HY-HVSU 70kV-29	70kV	29mA	2kW
HY-HVSU 70kV-43	70kV	43mA	3kW
HY-HVSU 70kV-58	70kV	58mA	4kW
HY-HVSU 70kV-72	70kV	72mA	5kW
HY-HVSU 70kV-86	70kV	86mA	6kW
HY-HVSU 70kV-115	70kV	115mA	8kW
HY-HVSU 70kV-143	70kV	143mA	10kW

Models	Output voltage	Output current	Output power
HY-HVSU 70kV-215	70kV	215mA	15kW
HY-HVSU 70kV-286	70kV	286mA	20kW
HY-HVSU 70kV-358	70kV	358mA	25kW
HY-HVSU 70kV-429	70kV	429mA	30kW
HY-HVSU 70kV-500	70kV	500mA	35kW
HY-HVSU 70kV-572	70kV	572mA	40kW
HY-HVSU 70kV-643	70kV	643mA	45kW
HY-HVSU 70kV-715	70kV	715mA	50kW

80kV Series Power Supply Selection

Models	Output voltage	Output current	Output power
HY-HVSU 80kV-12.5	80kV	12.5mA	1kW
HY-HVSU 80kV-25	80kV	25mA	2kW
HY-HVSU 80kV-37.5	80kV	37.5mA	3kW
HY-HVSU 80kV-50	80kV	50mA	4kW
HY-HVSU 80kV-62.5	80kV	62.5mA	5kW
HY-HVSU 80kV-75	80kV	75mA	6kW
HY-HVSU 80kV-100	80kV	100mA	8kW
HY-HVSU 80kV-125	80kV	125mA	10kW

Models	Output voltage	Output current	Output power
HY-HVSU 80kV-188	80kV	188mA	15kW
HY-HVSU 80kV-250	80kV	250mA	20kW
HY-HVSU 80kV-313	80kV	313mA	25kW
HY-HVSU 80kV-375	80kV	375mA	30kW
HY-HVSU 80kV-438	80kV	438mA	35kW
HY-HVSU 80kV-500	80kV	500mA	40kW
HY-HVSU 80kV-563	80kV	563mA	45kW
HY-HVSU 80kV-625	80kV	625mA	50kW

100kV Series Power Supply Selection

Models	Output voltage	Output current	Output power
HY-HVSU 100kV-10	100kV	10mA	1kW
HY-HVSU 100kV-20	100kV	20mA	2kW
HY-HVSU 100kV-30	100kV	30mA	3kW
HY-HVSU 100kV-40	100kV	40mA	4kW
HY-HVSU 100kV-50	100kV	50mA	5kW
HY-HVSU 100kV-60	100kV	60mA	6kW
HY-HVSU 100kV-80	100kV	80mA	8kW
HY-HVSU 100kV-100	100kV	100mA	10kW

Models	Output voltage	Output current	Output power
HY-HVSU 100kV-150	100kV	150mA	15kW
HY-HVSU 100kV-200	100kV	200mA	20kW
HY-HVSU 100kV-250	100kV	250mA	25kW
HY-HVSU 100kV-300	100kV	300mA	30kW
HY-HVSU 100kV-350	100kV	350mA	35kW
HY-HVSU 100kV-400	100kV	400mA	40kW
HY-HVSU 100kV-450	100kV	450mA	45kW
HY-HVSU 100kV-500	100kV	500mA	50kW

HY-HVSU Series Product Selection Table

120kV Series Power Supply Selection

Models	Output voltage	Output current	Output power
HY-HVSU 120kV-8.5	120kV	8.5mA	1kW
HY-HVSU 120kV-17	120kV	17mA	2kW
HY-HVSU 120kV-25	120kV	25mA	3kW
HY-HVSU 120kV-34	120kV	34mA	4kW
HY-HVSU 120kV-42	120kV	42mA	5kW
HY-HVSU 120kV-50	120kV	50mA	6kW
HY-HVSU 120kV-67	120kV	67mA	8kW
HY-HVSU 120kV-84	120kV	84mA	10kW

Models	Output voltage	Output current	Output power
HY-HVSU 120kV-125	120kV	125mA	15kW
HY-HVSU 120kV-167	120kV	167mA	20kW
HY-HVSU 120kV-209	120kV	209mA	25kW
HY-HVSU 120kV-250	120kV	250mA	30kW
HY-HVSU 120kV-292	120kV	292mA	35kW
HY-HVSU 120kV-334	120kV	334mA	40kW
HY-HVSU 120kV-375	120kV	375mA	45kW
HY-HVSU 120kV-417	120kV	417mA	50kW

150kV Series Power Supply Selection

Models	Output voltage	Output current	Output power
HY-HVSU 150kV-7	150kV	7mA	1kW
HY-HVSU 150kV-14	150kV	14mA	2kW
HY-HVSU 150kV-20	150kV	20mA	3kW
HY-HVSU 150kV-27	150kV	27mA	4kW
HY-HVSU 150kV-34	150kV	34mA	5kW
HY-HVSU 150kV-40	150kV	40mA	6kW
HY-HVSU 150kV-54	150kV	54mA	8kW
HY-HVSU 150kV-67	150kV	67mA	10kW

Models	Output voltage	Output current	Output power
HY-HVSU 150kV-100	150kV	100mA	15kW
HY-HVSU 150kV-134	150kV	134mA	20kW
HY-HVSU 150kV-167	150kV	167mA	25kW
HY-HVSU 150kV-200	150kV	200mA	30kW
HY-HVSU 150kV-234	150kV	234mA	35kW
HY-HVSU 150kV-267	150kV	267mA	40kW
HY-HVSU 150kV-300	150kV	300mA	45kW
HY-HVSU 150kV-334	150kV	334mA	50kW

200kV Series Power Supply Selection

Models	Output voltage	Output current	Output power
HY-HVSU 200kV-5	200kV	5mA	1kW
HY-HVSU 200kV-10	200kV	10mA	2kW
HY-HVSU 200kV-15	200kV	15mA	3kW
HY-HVSU 200kV-20	200kV	20mA	4kW
HY-HVSU 200kV-25	200kV	25mA	5kW
HY-HVSU 200kV-30	200kV	30mA	6kW
HY-HVSU 200kV-40	200kV	40mA	8kW
HY-HVSU 200kV-50	200kV	50mA	10kW

Models	Output voltage	Output current	Output power
HY-HVSU 200kV-75	200kV	75mA	15kW
HY-HVSU 200kV-100	200kV	100mA	20kW
HY-HVSU 200kV-125	200kV	125mA	25kW
HY-HVSU 200kV-150	200kV	150mA	30kW
HY-HVSU 200kV-175	200kV	175mA	35kW
HY-HVSU 200kV-200	200kV	200mA	40kW
HY-HVSU 200kV-225	200kV	225mA	45kW
HY-HVSU 200kV-250	200kV	250mA	50kW

HY-HVSU Series Technical Parameters

Constant Pressure Mode (CV Mode)

Voltage Output Range Can Be Set	<5kV:0.5%-100% output value; ≥10kV:1%-100% output value
Input Adjustment Rate (CV Model)	0.05%+500mV (The input voltage changes ± 10%)
Load Adjustment Rate (CV Model)	0.05%+500mV (No load to rated load)
Ripple RMS (5 Hz-20 MHz)	0.1%F.S.

Constant Current Mode (CC Mode)

Current Output Range Can Be Set	0 - Rated output value
Input Adjustment Rate (CC Model)	0.05% (The input voltage changes ± 10%)
Load Adjustment Rate (CCModel)	0.05% ±100uA (No load to rated load)

Programming And Readback Accuracy & Resolution

Voltage Output Programming Accuracy	0.1% of the rated output voltage
Current Output Programming Accuracy	0.2% of output current + 0.2% of rated output current
Voltage Setting Resolution	0.1V (≤6000V), 1V (>6000V)
Current setting resolution	0.1mA (≤6000mA), 1mA (>6000mA)
Voltage Output Read-Back Accuracy	±0.05% of rated output voltage + ±0.05% of actual voltage
Current Output Read-Back Accuracy	±0.1% of rated output current + ±0.1% of actual current
Voltage Read Back Resolution	0.01 V(≤10000), 0.1V(>10000V)
Current Read Back Resolution	0.01 mA(≤10000mA), 0.1mA (>10000mA)

Stability And Temperature Coefficient

Stability (Rated Output Voltage/Current)	U:0.05% I:0.05% (After 30 minutes of power on at a certain input voltage and load ambient temperature, 8 hours)
Temperature Coefficient (Rated Output Voltage/Current)	U:200ppm/°C I: 300ppm/°C (30 minutes after power on)

Protection Function

OVP Overvoltage Protection Setting Range	10-110%, beyond the limit output immediately off
OCP Overcurrent Protection Setting Range	0-105%, beyond the limit output immediately off
OTP Overtemperature Protection	Output beyond the limit is turned off immediately
OPP Overpower Protection	10-110%, beyond the limit output immediately off

HY-HVSU Series Technical Parameters

Environmental Condition	
Environment	Indoor use; Installation overvoltage class: II; Pollution level: P2; Class II equipment
Operating Ambient Temperature	0°C to 50°C, optional -10°C to 50°C, -20°C to 50°C, -40°C to 50°C
Storage Ambient Temperature	-20°C to 65°C,
Working Ambient Humidity	20%-90% RH, no dew formation, continuous operation
Storage Environment Humidity	10% - 95% RH, no dew formation
Altitude	Above 2000 meters above sea level, every 100 meters up, the power will be reduced by 2%, or reduce the maximum working ambient temperature by 1°C per 100 meters; When not in operation, the altitude can reach 12,000 meters
Cooling	Forced air cooling, intelligent speed regulating fan, front/side air inlet, rear air outlet
Noise	≤ 65dB(A), use 1 m to weighted measurement

Control Panel	
Display	4/7 inch LCD display, touch screen
Control Function	Digital key input, multi-stage shuttle knob adjustment (outer ring coarse adjustment/inner ring fine adjustment), output ON/OFF switch, Lock keyboard and touch lock, Reset Restart status indicator (Shift/Local/Remote/Alarm/Lock/Output)
Programming Function	Step, Ladder, Gradient

Input Power Supply	
Frequency	47 Hz - 63 Hz
Connection Mode	Single-phase two-wire + ground, 220 V ± 15% Three-phase three-wire + ground wire, 380 V ± 15% (-3P standard configuration model)

Size And Weight	Note: See page P112 for more information on appearance and display
Size	2U model:430(W) * 500(D) * 88(H) mm 3U model:450(W) * 660(D) * 133(H) mm 4U model:433(W) * 560(D) * 177(H) mm
Weight	15kg/2U ; 35kg/3U;45kg/4U
Colour	RAL 7035

Programmability

Programmable Function

DC Power Supply		Step Mode			
VOLTAGE		STEP			
CURRENT		mA			
POWER		W			
Start - Stop	Running	Cycles	Running Time		
—			:	:	:
C	D	H	M	W:	H
					S

Homepage

Ladder Mode			
Initial Voltage	V		
Step Voltage	V		
Number of Step			
Time of Step	:	:	:
Cycles			
Save	ESC		




The ladder setting page can set the required initial frequency, step frequency, initial voltage, step voltage, step times and step time.

Step Mode			Start	Stop	
No.	VOLTAGE(V)	CURRENT(mA)	Running Time (h:m:s.ms)		
			:	:	:
			:	:	:
			:	:	:
			:	:	:
			:	:	:
			:	:	:

Ramp Mode			Start	Stop	
No.	VOLTAGE(V)	CURRENT(mA)	Running Time (h:m:s.ms)		
			:	:	:
			:	:	:
			:	:	:
			:	:	:
			:	:	:




The gradient setting page can set the required voltage, frequency, running time, initial step and end step and cycle times.

Output Waveform

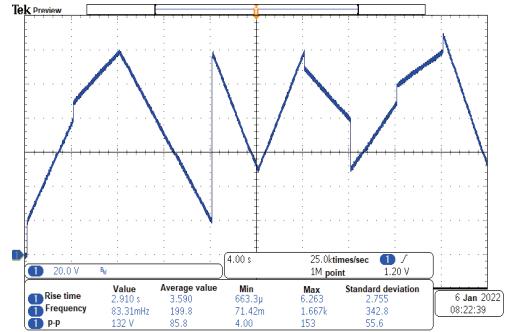
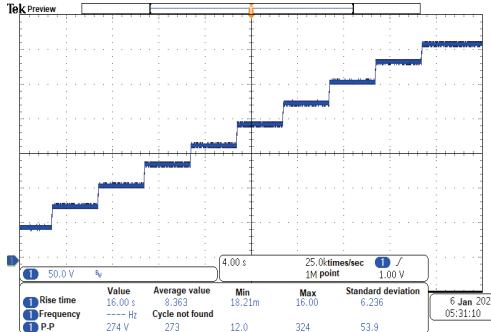
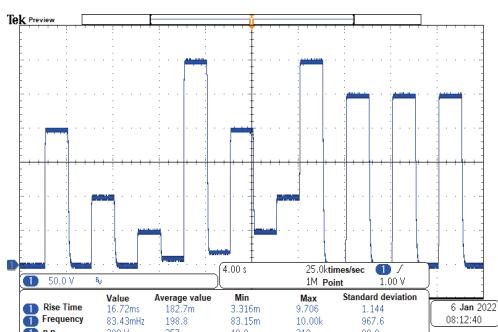


Appearance&Size Outline Dimension

2U 430(W) * 500(D) * 88(H) mm

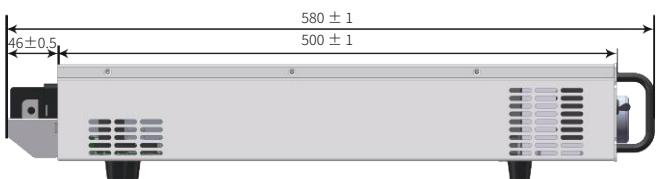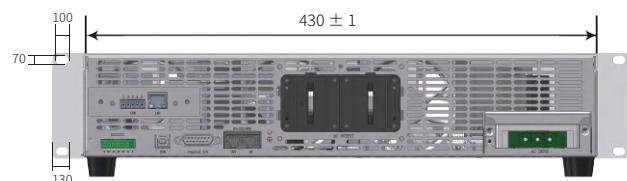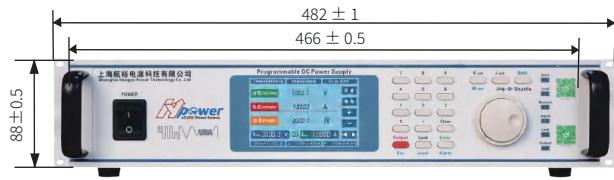


3U 482.6(W) * 660(D) * 133(H) mm

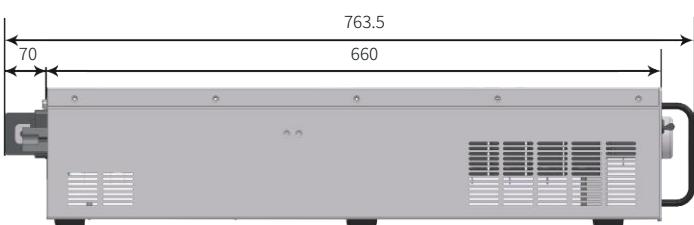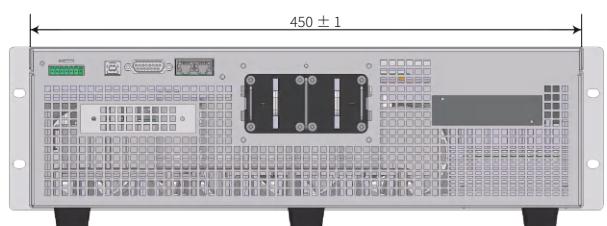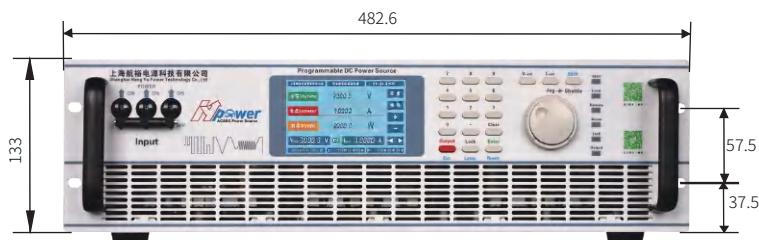


Display and Control Panel Display & Control Panel

Control Panel

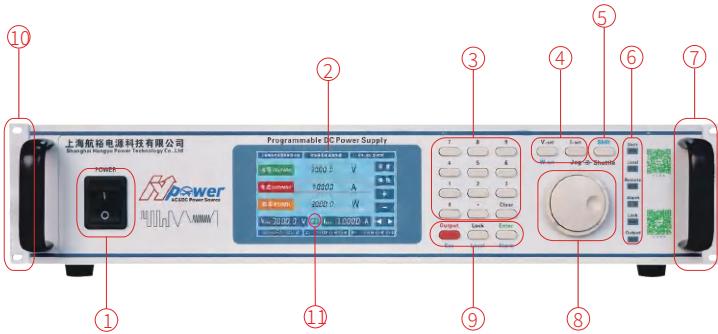

- ① Power input circuit breaker (2U single-phase, 3U three-phase)
- ② LCD display (4-inch, touch screen)
- ③ Number input keyboard
- ④ Voltage/current setting key
- ⑤ Shift Function reset key
- ⑥ Status
- ⑦ Chassis handle
- ⑧ Multistage shuttle adjustment knob (inner circle fine adjustment/outer circle coarse adjustment)
- ⑨ Lock, Enter to confirm, Esc to exitLocal, Reset restart
- ⑪ Output ON/OFF switch
- ⑩ 19 inch standard rack mounting holes
CC/CVPriority can be set

Rear Panel

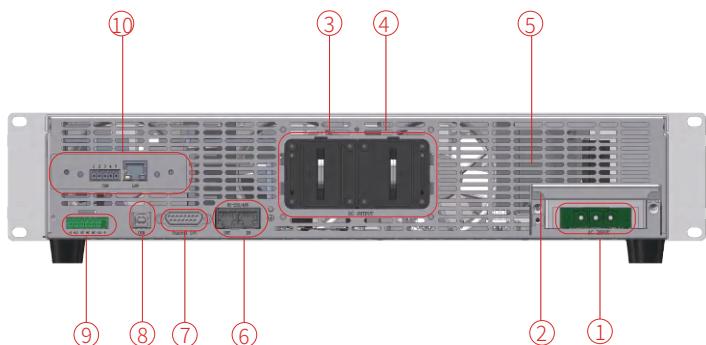

- ① AC input terminal
- ② AC input terminal protective cover
- ③ DC output terminal (+/-)
- ④ DC output terminal protective cover
- ⑤ Heat dissipation air outlet
- ⑥ RS-485 & RS-232 communication interface
- ⑦ Digital I/O communication interface
- ⑧ USB communication interface
- ⑨ Remote compensation measurement terminal
- ⑩ Purchase communication interface (one out of three)
 - LAN & CAN communication interface
 - GPIB communication interface
 - Analog programming and monitoring interface (isolated type)

Display Interface



- ① Manufacturer's name
- ② product name
- ③ Model
- ④ Voltage/current/power read back display area
- ⑤ Function setting area
- ⑥ Voltage/Current Setpoints&CV/CC Status
- ⑦ TIME
- ⑧ Accumulated running time
- ⑨ This run time

Cooperative Customers (Part)

Power Semiconductor Customer

						
Changchun National Science	Electrical industry	China Resources Microelectronics	Shanghai Huinengtai Semiconductor	Yuxin Technology	Wishing to create technology	Group core microelectronics
						
Hangzhou Zhongsi	Feishide	Suzhou Lianxun Instrument	Weiyujia Semiconductor	Shanghai Zhanxin Semiconductor	Chengxin Technology	Zhuoxinda Technology

Enterprise In The Field Of Automotive Electronics

						
CATARC	CAERI	BMW	China FAW Group Corporation	Hong Qi Automobile	SAIC Motor	Saic Volkswagen
						
Tesla Inc.	Weilai	Xiaomi Automobile	BYD	Valeo	polary	Lantu Automobile
						
GEELY Automobile	Huichuan	HAOMO.AI	Shanghai Tongmin	Ningde Age	Human Horizons	Hezhong New Energy

High-Tech R&D Enterprise

						
Huawei	FARATRONIC	Panasonic	EPCOS	TYCO	Weidmuller	Honeywell
						
Nader	SIEMENS	ABB	Schneider	NOSRK	HONGFA	EOPLE
						
FLUKE	Philips	Gree	Guilin Rubber Machinery Factory	CASCO	CRRC	US PI
						
HILTI	BOSCH	Linde	NARI TECHNOLOGY	Shanghai Electric	New Thunder Energy	Silan

Cooperative Customers (Part)

Aerospace & Defense Military Industry Research Institute



CASC



CASIC



AVIC



AECC



CETC



CSSC



CSIC

CASC 800 (Shanghai Aerospace Precision Machinery Research Institute)

CASC 801 (Shanghai Institute of Space Propulsion)

CASC 803 (Shanghai Aerospace Control Technology Institute)

CASC 804 (Shanghai Aerospace Electronic Communication Equipment Research Institute)

CASC 805 (Shanghai Aerospace System Engineering Institute)

CASC 808 (Shanghai Precision Measurement and Testing Institute)

CASC 811 (Shanghai Space Power Research Institute)

CASC 812 (Shanghai Satellite Equipment Research Institute)

CASC 502 (Beijing Control Engineering Research Institute)

CASC 510 (Lanzhou Institute of Space Technology Physics)

CASC 203 (China Ordnance Industry 203 Research Institute)

CASIC 206 (Beijing Machinery and Equipment Research Institute)

CASIC 242 Factory (Lanzhou Flight Control Co., LTD.)

CASIC 307 Factory (Aerospace Chenguang Co., LTD.)

CASIC 33 (33 Aerospace Science and Industry Institutes)

CASIC 3651 Factory (Shanghai Aerospace Control Technology Institute)

AVIC 603 (AVIC Xi'an Aircraft Design and Research Institute)

AVIC 613 (Luoyang Electro-Optical Equipment Research Institute of Aviation Industry Corporation of China)

AVIC 615 (Aeronautical Radio Electronics Research Institute of China)

AVIC 618 (Xi'an Flight Automatic Control Research Institute)

AVIC 631 (Aviation Computing Technology Research Institute of AVIC)

AVIC 105 Factory (Tianjin Aviation Electromechanical Co., LTD.)

AVIC 115 Factory (Shaanxi Aero Electric Co., LTD.)

AVIC 118 Factory (Shanghai Aviation Electric Appliance Co., LTD.)

AVIC 135 Factory (State-owned Wanli Electromechanical Factory)

AVIC 181 Factory (Wuhan Aviation Instrument Co., LTD.)

AVIC 304 (Beijing Great Wall Institute of Measurement and Testing Technology)

AECC 606 (Shenyang Engine Research Institute)

AVIC 607 (China Leihua Electronic Technology Institute)

Jiangnan Shipbuilding (Group) Co., LTD

Nanjing Panda Electronics Co., LTD

State-owned 741 Factory (Nanjing Huadong Electronics Group Co., LTD.)

Institute of Modern Physics, Chinese Academy of Sciences

CETC 14 (Nanjing Institute of Electronic Technology)

CETC 21 (Shanghai Micromotor Research Institute)

CETC 23 (Shanghai Transmission Line Research Institute)

CETC 36 (Gangnam Electronics and Communication Research Institute)

CETC 38 (East China Institute of Electronic Engineering)

CETC 50 (Shanghai Microwave Technology Research Institute)

CETC 51 (Shanghai Microwave Equipment Research Institute)

CETC 54 (Shijiazhuang Communication Measurement and Control Technology Research Institute)

CETC 55 (Nanjing Institute of Electronic Devices)

CSIC 707 (Tianjin Institute of Marine Instruments)

CSIC 7107 (Shaanxi Aerospace Navigation Equipment Co., LTD.)

CSIC 719 (Wuhan Second Ship Design Institute)

CSIC 704 (Shanghai Marine Equipment Research Institute)

CSIC 726 (Shanghai Marine Electronic Equipment Research Institute)

Scientific Research & Third Party Quality Inspection Agency



中国科学院
CHINESE ACADEMY OF SCIENCES

Technical Institute of Physics and Chemistry (Beijing)

Institute of Urban Environment (Xiamen)

Electrotechnical Research Institute (Beijing)

Institute of Applied Physics (Shanghai)



中国地震局

地壳应力研究所
The Institute of Crustal Dynamics



上海电器科学研究院(集团)有限公司

Shanghai Electrical Apparatus Research Institute (Group) Co., Ltd.



苏州电器科学研究院股份有限公司

国家智能电网中高压成套设备质量监督检验中心
国家电器产品质量监督检验中心



长春市产品质量监督检验院

Changchun product quality supervision and inspection institute



西安市产品质量监督检验院

Xi'an Supervision & Inspection Institute of Product Quality




杭州市质量技术监督检测院

Cooperative Customers (Part)

The Chinese People's Liberation Army

South Sea Fleet
East China Sea Fleet
North Sea Fleet
Navy Factory 701 / Factory 702
4724 Factory (Shanghai Haiying Machinery Factory)
Unit 95861 (Air First Base)
5720 Factory of the People's Liberation Army of China

Commercial Aviation

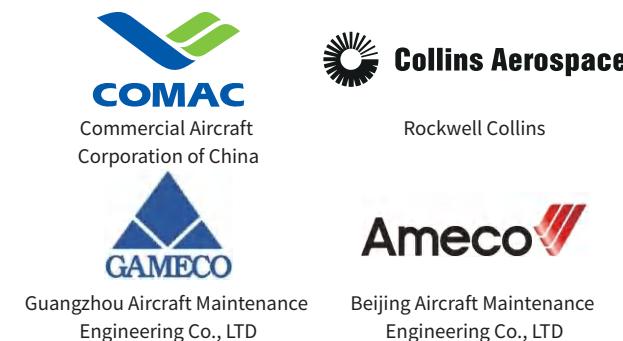

Rockwell Collins

Military Academies & Local Universities





Official wechat:hypower-cn



Contact us

Hangyu Power System (Shanghai) Co., Ltd.

Mobile/Whatsapp:+8613801800699

Fax:+86-21-67285228-8009

Email:sales@hangyupower.com

neo@hangyupower.com

Address: Block B, Building 11, No. 1698 Minyi Road, Songjiang District, Shanghai

Web:www.hangyupower.com

©Hangyu Power System, 2024

Programmable DC Power Supply Product Catalog, version 08.00, April 2024

All technical data and instructions are based on the actual product

If there is any change, Hangyu Power has the final interpretation right

Authorized distributor:

