

TECNOTION[®]


THE LINEAR MOTOR COMPANY

Frameless torque motor series




Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.


STATOR

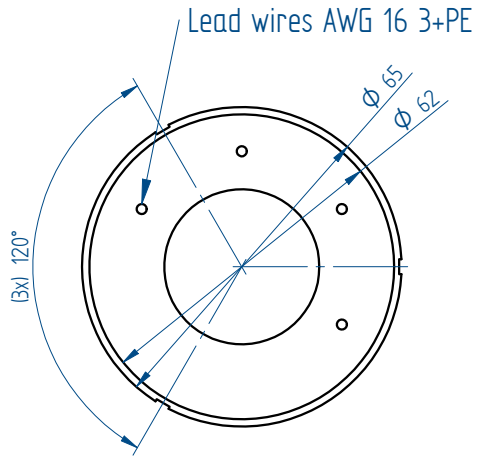


QTR-A 65-17

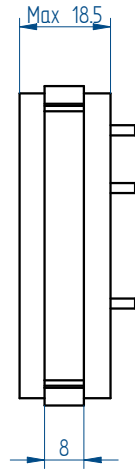


QTR-A 65-25

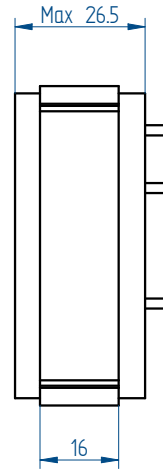




QTR-A 65-34

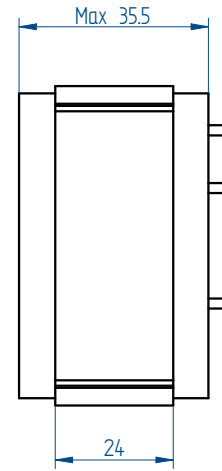

QTR-A 65-60

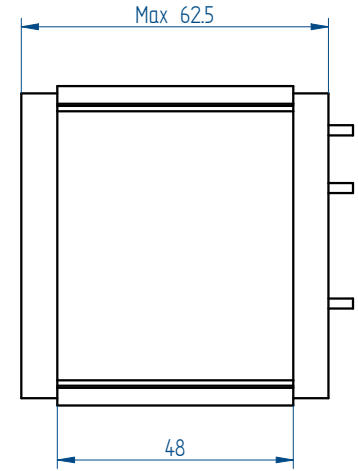


ROTOR

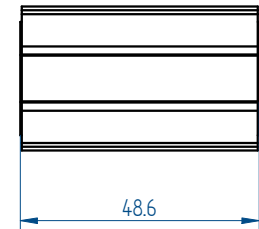

* All sizes are in mm

©2019 Tecnotion BV - All rights reserved - The contents of this document are subject to change without prior notice.

	Parameter	Remarks	Symbol	Unit	QTR-A 65-17	QTR-A 65-25	QTR-A 65-34	QTR-A 65-60
Performance	Winding type				N	N	Y	Y
	Motortype max. voltage ph-ph	3-phase synchronous		$V_{acrms} (V_{dc})$	420 (600)			
	Ultimate torque @ 20°C/s increase	magnet @ 25°C	T_u	Nm	0.64	1.31	2.25	5.47
	Peak torque @ 6°C/s increase	magnet @ 25°C	T_p	Nm	0.42	0.85	1.43	3.82
	Continuous torque	coil @ 100°C	T_c	Nm	0.29	0.66	1.08	2.31
	Maximum speed ⁽³⁾ @ 48 Volt	@ Tc	n_{max}	rpm	5735	2673	3456	910
	Maximum speed @ max. voltage	@ Tc	n_{max}	rpm	28000	28000	28000	16960
	Motor torque constant	up to Ic	K_t	Nm/A _{rms}	0.060	0.118	0.098	0.267
	Motor constant	coils @ 25°C	K_m	(Nm) ² /W	0.0021	0.0059	0.0111	0.0321
	Electrical	Ultimate current	magnet @ 25°C	I_u	A _{rms}	13.84	13.84	27.98
Peak current		magnet @ 25°C	I_p	A _{rms}	7.58	7.58	15.32	15.05
Maximum continuous current ⁽¹⁾		coils @ 100°C	I_c	A _{rms}	4.86	5.61	11.07	8.65
Back EMF phase-phase _{peak}			K_e	V/krpm	5.1	10.1	8.4	22.8
Back EMF phase-phase _{RMS}			K_e	V/krpm	3.6	7.2	5.9	16.1
Coil resistance per phase		coils @ 25°C ex. cable	R	Ω	0.575	0.799	0.287	0.741
Coil induction per phase		$l < 0.6 l_p$	L	mH	0.86	1.62	0.69	2.10
Electrical time constant		coils @ 25°C	τ_e	ms	1.5	2.0	2.4	2.8
Poles			N_{mgn}	nr	8	8	8	8
Thermal		Continuous power loss	coils @ 100°C	P_c	W	53	99	138
	Thermal resistance ⁽²⁾	coils to mount. sfc.	R_{th}	°C/W	1.50	0.81	0.58	0.37
	Thermal time constant	up to 63% max. coiltemp.	τ_{th}	s	21	16	16	38
	Temperature cut-off / sensor				No temperature sensor			
Mechanical	Stator OD		OD _s	mm	65			
	Rotor ID		ID _R	mm	17			
	Motor height		H _{motor}	mm	18	26	35	62
	Lamination stack height		H _{arm}	mm	8	16	24	48
	Rotor inertia		J _R	kg*m ²	3.8E-06	7.5E-06	1.1E-05	2.3E-05
	Stator mass	excluding cables	M _s	g	149	248	361	717
	Rotor mass		M _R	g	27	54	80	160
	Total mass	excluding cables	M _T	g	176	302	441	877
	Cable mass	all cables	m	g	36			
Cable type (power)	length 0.5 m	d	mm (AWG)	2.06 (16)				

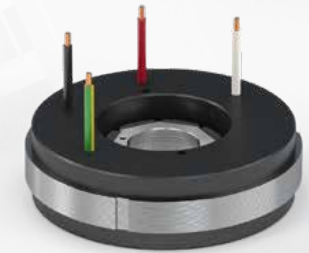

QTR-A 65 Stator and rotor shown with a height of 17 mm

1. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool or manual.
2. Rth based on radial mounting of stator lamination stack.
3. MAXIMUM allowable speed for QTR-A 65 series motors is 28.000 rpm. If you plan a high speed application, please contact Tecnotion.

All specifications ±0%

This catalogue is offered to you by:

Tecnotion Headquarters

Twentepoort West 15
7609 RD Almelo
The Netherlands

Tel. +31 (0)546 536 300
Fax +31 (0)546 536 380
sales@tecnotion.com

Tecnotion GmbH

Elsenheimerstraße 59
80687 München
Deutschland

Tel. +49 89 381537-400
Fax +49 89 381537-409
info@tecnotion.de

Tecnotion Sp. z o.o.

Ul. Ryżowa 49
02-495 Warszawa
Poland

Tel. +48 606 544 046
info@tecnotion.pl

Tecnotion Rep. of Korea

Room #409,
Seoul Forest Halla Eco Valley
25, Ttukseom-ro 1-gil
04778 Seongdong-gu,
Seoul South Korea

Tel. +82 (0)10 4540 5599
korea@tecnotion.com

Tecnotion USA

200 Broad Hollow Rd -
Suite 207
Melville, NY, 11747
United States

Tel.+01 (631) 983-2833
sales@tecnotion.com