


AM-BL2032AN Series

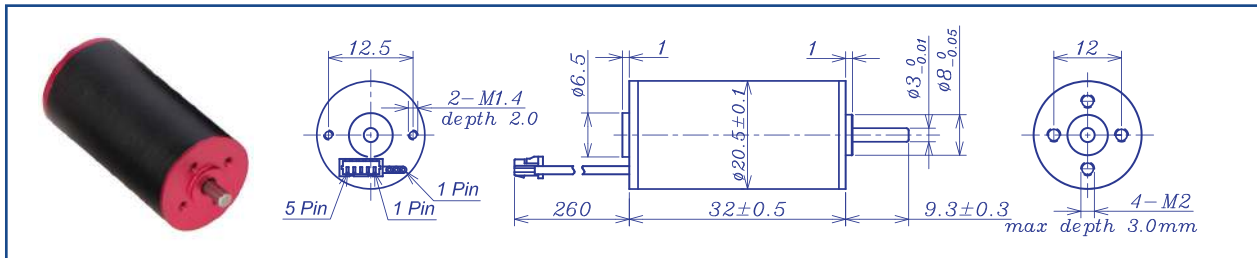


		Brushless Motor		Ball Bearings				
Motor Model			1225	1220	1822	1819	2419	2415
Nominal voltage		V	12	12	18	18	24	24
No load speed ±12%		rpm	24525	19908	22265	18634	19339	14850
No load current Max150%		mA	200	150	120	100	90	70
Recommend limit for continuous operating	Max cont. torque	mN.m	2.3	4.2	2.9	4.5	3.6	4.6
	Rated Speed	rpm	23581	18096	21080	16679	17806	12731
	Rated Current	mA	700	900	500	600	400	380
	Rated Power	W	5.7	8.0	6.4	7.9	6.7	6.2
Starting current		mA	13187	8392	7258	4865	4000	2243
Stall torque		mN.m	60	47	54	43	45	32
Maximum power output		W	38.4	24.3	31.6	21.0	22.9	12.6
Maximum Efficiency		%	77	75	76	73	72	68
Terminal resistance ±12%		Ω	0.91	1.43	2.48	3.7	6.0	10.7
Inductance (1KHz)		mH	0.07	0.11	0.19	0.29	0.47	0.86
Mechanical time constant		ms	3.0	3.1	3.0	3.1	3.1	3.3
Moment of inertia		gcm <sup>2</sup>	0.69	0.69	0.69	0.69	0.69	0.69
Torque constant		mN.m/A	4.6	5.7	7.6	9.0	11.6	15.0
Speed constant		rpm/V	2075	1689	1258	1057	824	639
Speed/torque gradient		rpm/mN.m	410.4	427.3	410.8	432.9	427.0	457.1
Weigh		g						

ADDITIONAL INFORMATION

Motor thermal resistance:	22.8K/W	Motor thermal time constant:	552S
Axial (dynamic):	2.5 N	Radial (5mm from mounting face):	16.0 N
Press-fit force (static):	50 N	Max allowable screw depth into flange:	3.0 mm
Maximum radial play (5mm from mounting face):	≤0.02 mm	Axial play:	0 (<4.0N)
Maximum winding temperature:	85°C	Ambient temperature range:	-30 to 65°C
Standard rear shaft diameter:	3 mm	Standard rear shaft length "L":	0/3.7/5.5 mm

Connection (AWG 24#)	Total Length: L <sub>T</sub> =L1+L2+L3				
Cable 1: Yellow Winding A	L1:20GP	L1:24GP	L2:BL20	L3:EN16S	L3:EN16T
Cable 2: Red Winding B	18.8	22.2	32.0	10.7	12.0
Cable 3: Blue Winding C	23.6	27.4			
Plug definition (AWG 28#) Molex:51021-0500	28.4	32.6			
Plug 1: Red Hall 3~16V					
Plug 2: Black Hall GND					
Plug 3: Yellow Hall A	Remarks: Client can choose gearbox and encoder to match with this motor. Some combinations are listed here for reference.				
Plug 4: Red Hall B					
Plug 5: Blue Hall C					

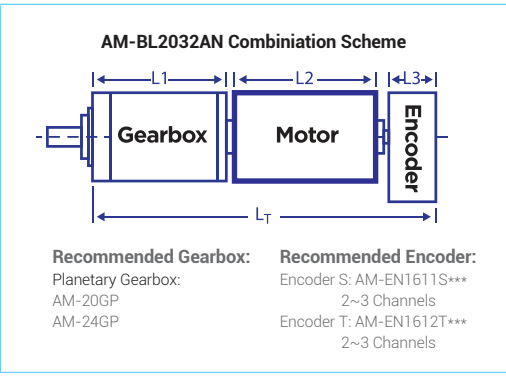

Motor data tested at 25°C. Motor operation exceeding continuous limits will reduce life or result in damage. At elevated ambient temperatures, load current must be reduced.

Download datasheet: <https://assunmotor.com/documents-download>