


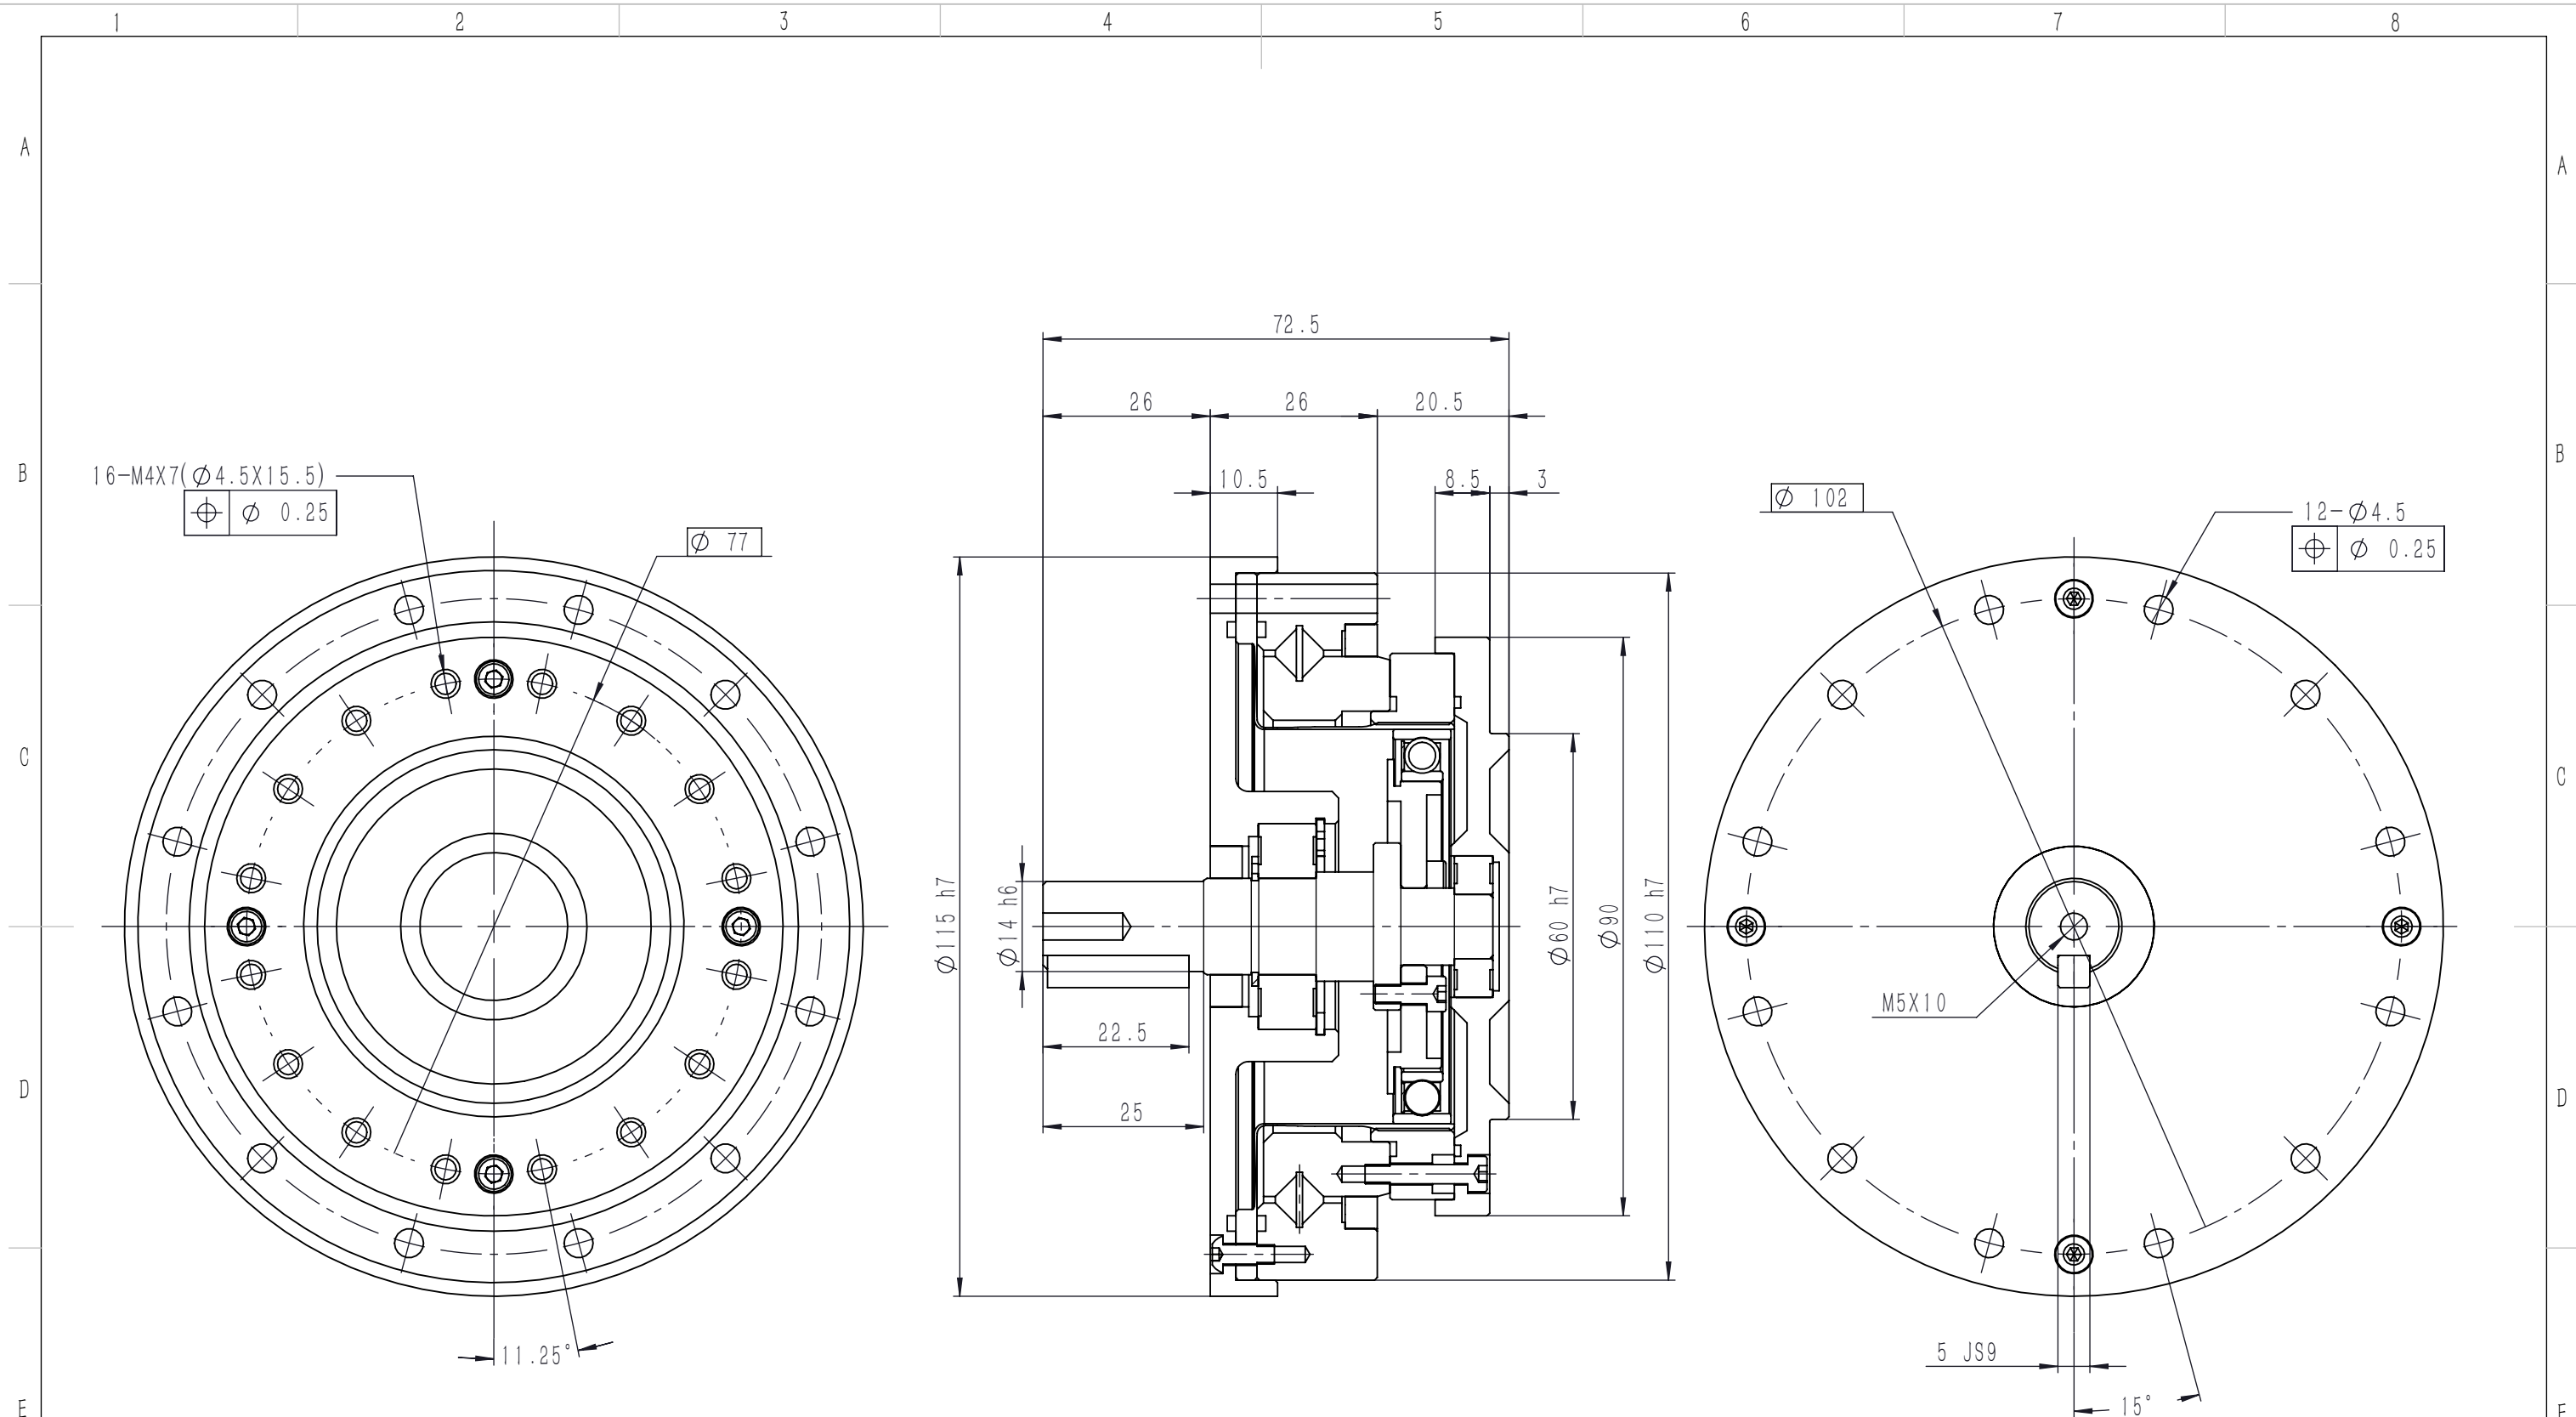

Specification :

| Model | Reduction ratio | Rated torque at input<br>2000r/min<br>(Nm) | Permissible peak torque at start/stop<br>(Nm) | Permissible max. value of ave. load torque<br>(Nm) | Instantaneous permissible max. torque<br>(Nm) | Permissible max. input rotational speed<br>(r/min) | Permissible ave. input rotational speed<br>(r/min) | Back clearance<br>(arc sec) | Transmission accuracy<br>(arc sec) |
|-------|-----------------|--------------------------------------------|-----------------------------------------------|----------------------------------------------------|-----------------------------------------------|----------------------------------------------------|----------------------------------------------------|-----------------------------|------------------------------------|
|       |                 |                                            |                                               |                                                    |                                               |                                                    |                                                    | ≤                           | ≤                                  |
| 25    | 80              | 74                                         | 160                                           | 102                                                | 299                                           | 5500                                               | 3500                                               | 20                          | 60                                 |

HMHS-25-80-IV

Han's Motion