

Absolute encoders - SinCos

Integral bearing for integration in motors



FNC SC2048 Series, SinCos motorfeedback



(Standard comes with expanding coupling and 7 meter cable)

Features

- Compact robust motor integration design
- 1 Vpp / 1 PPR accurate position information
- 2048 PPR sin cosine accurate speed information
- Installation diameter 65 mm
- 1:10 taper shaft
- IP54 protection class



Technical data - mechanical design

Dimensions (flange)	Ø56 mm
Clamp mounting diameter	65 mm
Protection DIN EN 60529	IP 54
Operating speed	≤10000 rpm
Starting torque	≤0.03 Nm
Materials	Housing : Aluminium Flange : Aluminium Shaft : Stainless steel
Shaft specs	Taper shaft Ø 9.25 Taper 1:10
Operating temperature	-40...+110 °C
Storage temperature	-40 °C up to +120 °C
Weight approx.	250 g
Approval	CE

Technical data - electrical ratings

Voltage supply	4.75VDC to 5.5VDC
Protection:	Output short circuit protection. Reverse polarity protection
Consumption w/o load	≤120 mA (5 VDC)
Interface, Output	Sine cosine / 1 Vpp
Resolution (steps/turn)	2048
Absolute accuracy	±0.17°
Absolute angle error	0.087°
Output frequency	500 kHz (max.)
Output circuit	1 Vpp incremental Sin/Cos differential driver



Pulse Diagram

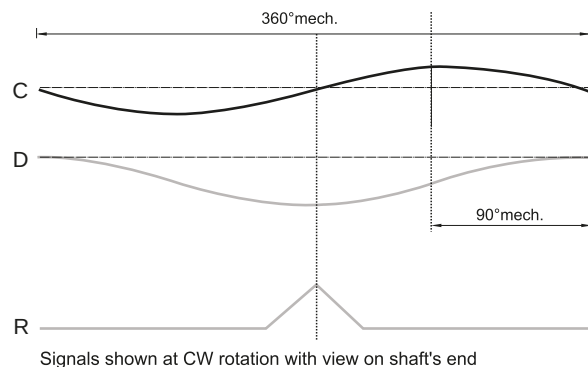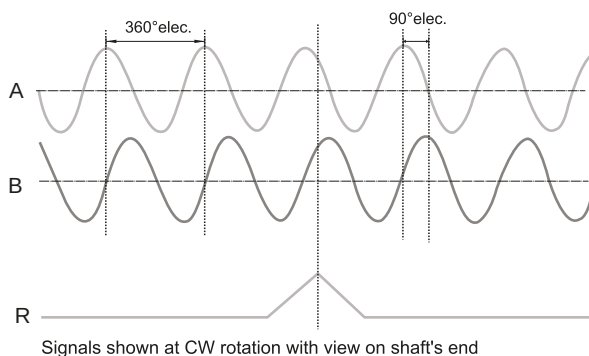



FNC SC2048 Series, SinCos motorfeedback

Mechanical Dimensions



CR spring version

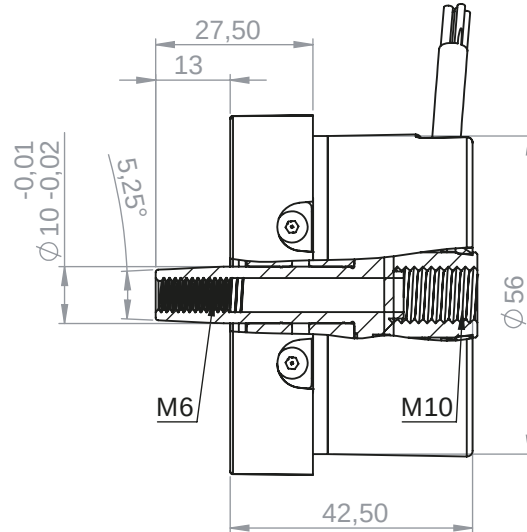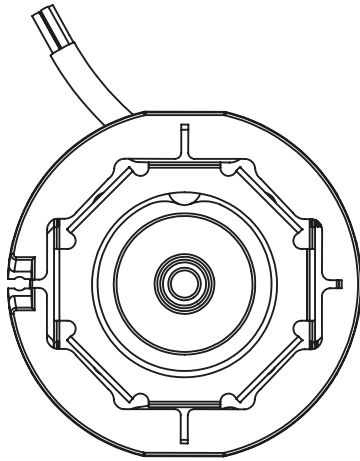

SF spring version

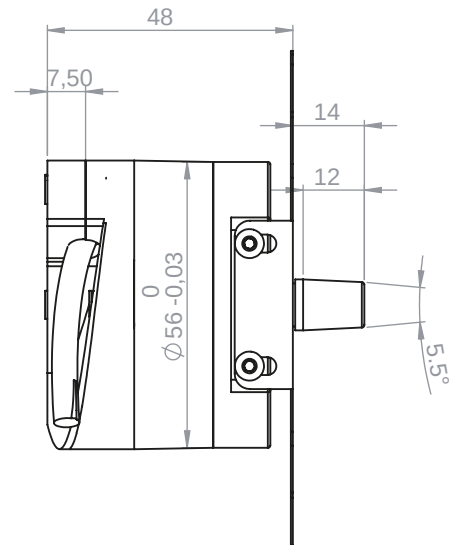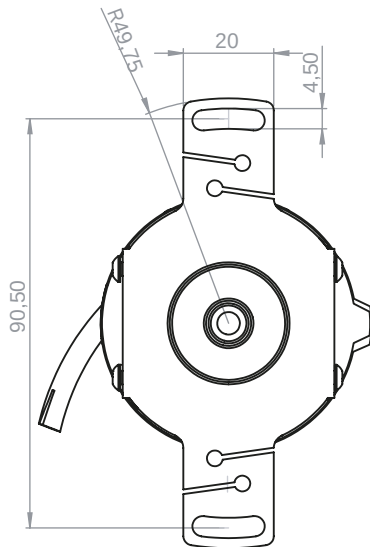

S8 spring version

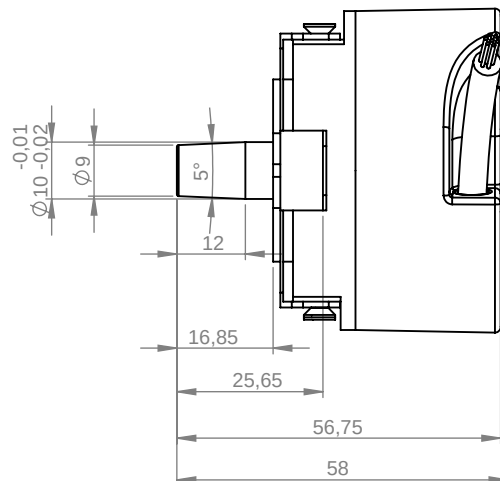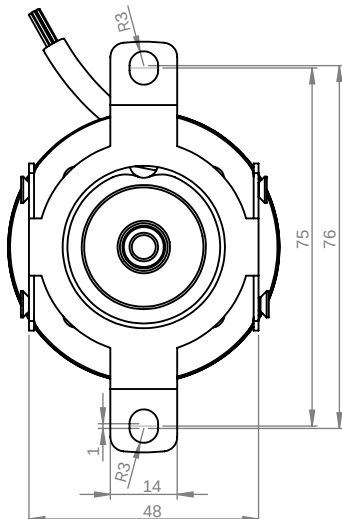

Absolute encoders - SinCos

Integral bearing for integration in motors




FNC SC2048 Series, SinCos motorfeedback

Cable / Connector Wiring

Function	FNC SC2048 R7 (Direct 7 meter cable)		FNC SC2048 R03-2D15	FNC SC2048 R7-3D15	FNC SC2048 R03-3D15
+VB		Brown	Kahverengi	pin 9	pin 9
GND		White	Beyaz	pin 11	pin 7
A		Green	Yeşil	pin 1	pin 5
A'		Green-Black	Yeşil-Siyah	pin 2	pin 6
B		Yellow	Sarı	pin 3	pin 8
B'		Yellow-Black	Sarı-Siyah	pin 4	pin 1
C		Blue	Mavi	pin 5	pin 10
C'		Blue-Black	Mavi-Siyah	pin 6	pin 11
D		Orange	Turuncu	pin 7	pin 12
D'		Orange-Black	Turuncu-Siyah	pin 8	pin 13
Z		Gray	Gri	pin 12	pin 3
Z'		Gray-Black	Gri-Siyah	pin 13	pin 4
Shield	Connected to housing		 2 row, 15 pin dsub	 3 row, 15 pin dsub	

Encoder Part Number

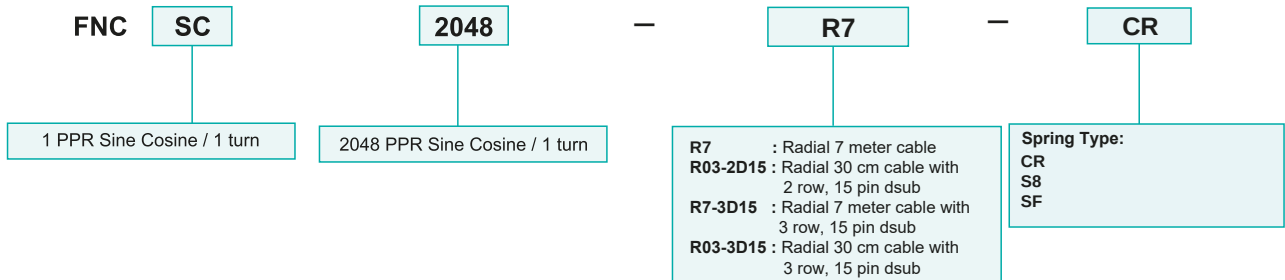

Female Cable Connector

